

**CONTINUOUS DUTY**
**4 poles  
50 Hz - 1500 rpm / 60 Hz - 1800 rpm**

<b>AMBIENT TEMPERATURE</b>	40°C	<b>WINDING DATA</b>		Winding code	<b>80</b>			
<b>TEMPERATURE RISE</b>	H			Number of leads	<b>6</b>			
<b>INSULATION CLASS</b>	H			Winding pitch	<b>2/3</b>			
<b>POWER FACTOR</b>	0,8							
<b>FREQUENCY</b>	Hz	<b>50 Hz</b>			<b>60 Hz</b>			
<b>VOLTAGE</b>	Star V	<b>380</b>	<b>400</b>	<b>415</b>	<b>416</b>	<b>440</b>	<b>460</b>	<b>480</b>
<b>RATING</b>	kVA kW	<b>1600</b> <b>1280</b>	<b>1650</b> <b>1320</b>	<b>1650</b> <b>1320</b>	<b>1740</b> <b>1392</b>	<b>1840</b> <b>1472</b>	<b>1920</b> <b>1536</b>	<b>1980</b> <b>1584</b>
<b>EFFICIENCY [%] @ 0,8 p.f.</b>	4/4 3/4 2/4	95,8 95,9 96,0	96,0 96,1 96,2	96,1 96,1 95,9	96,0 96,2 96,2	96,1 96,3 96,3	96,3 96,4 96,4	96,3 96,4 96,4
<b>EFFICIENCY [%] @ 1 p.f.</b>	4/4 3/4 2/4	96,7 96,8 96,8	96,8 96,9 97,0	96,9 96,9 96,8	96,8 97,0 97,0	96,9 97,1 97,1	97,1 97,2 97,2	97,1 97,2 97,2
<b>SHORT CIRCUIT RATIO</b>	SCR	0,34	0,37	0,40	0,32	0,33	0,35	0,37
<b>REACTANCES [%]</b>								
Direct axis synchronous	X <sub>d</sub>	325	303	281	354	335	320	303
Quadrature axis synchronous	X <sub>q</sub>	181	169	157	197	187	178	169
Direct axis transient	X' <sub>d</sub>	29,8	27,7	25,7	32,4	30,6	29,2	27,7
Direct axis subtransient	X'' <sub>d</sub>	12,7	11,8	10,9	13,8	13,0	12,4	11,8
Quadrature axis subtransient	X'' <sub>q</sub>	13,2	12,3	11,4	14,4	13,6	13,0	12,3
Negative sequence	X <sub>2</sub>	12,9	12,0	11,2	14,1	13,3	12,7	12,0
Zero sequence	X <sub>0</sub>	2,9	2,7	2,5	3,1	2,9	2,8	2,7
<b>TIME CONSTANTS [s]</b>								
Open circuit	T' <sub>do</sub>					3,47		
Transient	T' <sub>d</sub>					0,32		
Subtransient	T'' <sub>d</sub>					0,018		
Armature	T <sub>a</sub>					0,032		

**MECHANICAL CHARACTERISTICS**

D-end bearing/Lubrication	6326 C3 / With grease nipple
N-end bearing/Lubrication	6320 C3 / With grease nipple
Overspeed [r.p.m.]	2250
Inertia (J) [kgm <sup>2</sup> ]	Refer to B34 construction 34
Weight [kg]	Refer to B34 construction 3600
Method of cooling	IC01
Cooling air required [m <sup>3</sup> /s] @ 50/60 Hz	1,50 / 1,80
Degree of protection	IP23
Types of construction available	B2 (SAE) - IM B34 - IM B20
Direction of rotation (Standard)	CW

**OTHER DATA**

Phase resistance [Ω] @ 20 °C - Star series	1,15
Overloads	10% for 1 hour every 12 hours
3-phase short circuit sustained current	≥ 300 % (3 I <sub>n</sub> ) with auxiliary winding
Voltage regulation accuracy	± 0,5 % I <sub>n</sub> steady state condition
Radio interference	EN 55011 - Class B Group 1
Wave form THF	< 2%
Total harmonic content	< 2% - At no load


**STANDARDS**

IEC 60034-1; CEI 2-3; BS 4999-5000; VDE 0530; NF 51-100,111; OVE M-10, NEMA MG 1.22.


**Typical efficiency curves**

**50 Hz - 1500 rpm**

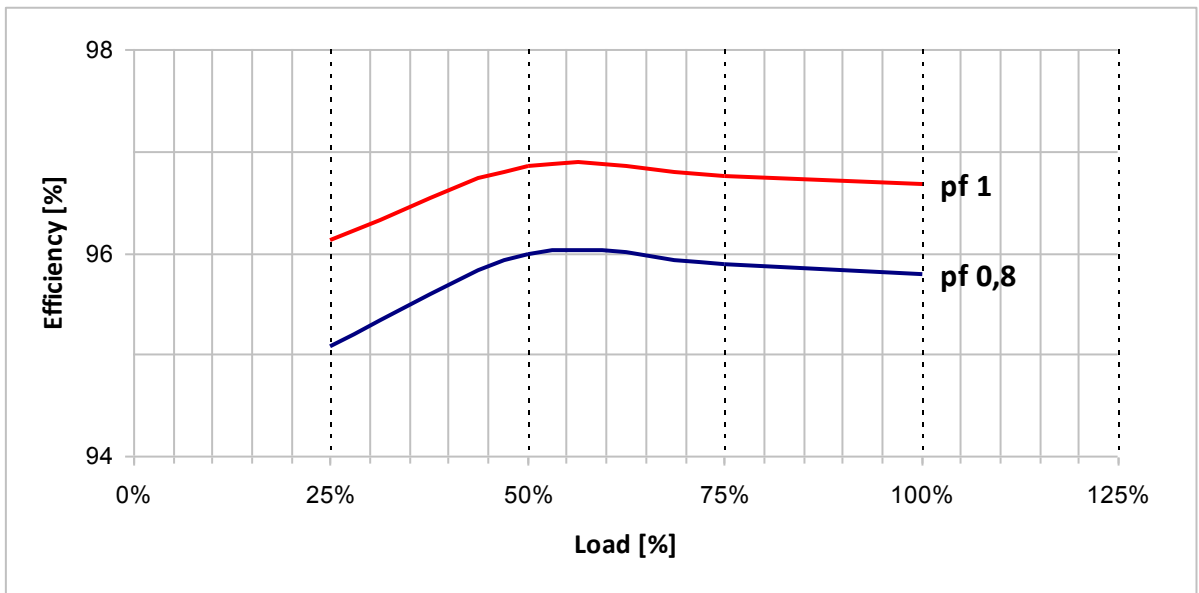
**380 V**







**400 V**


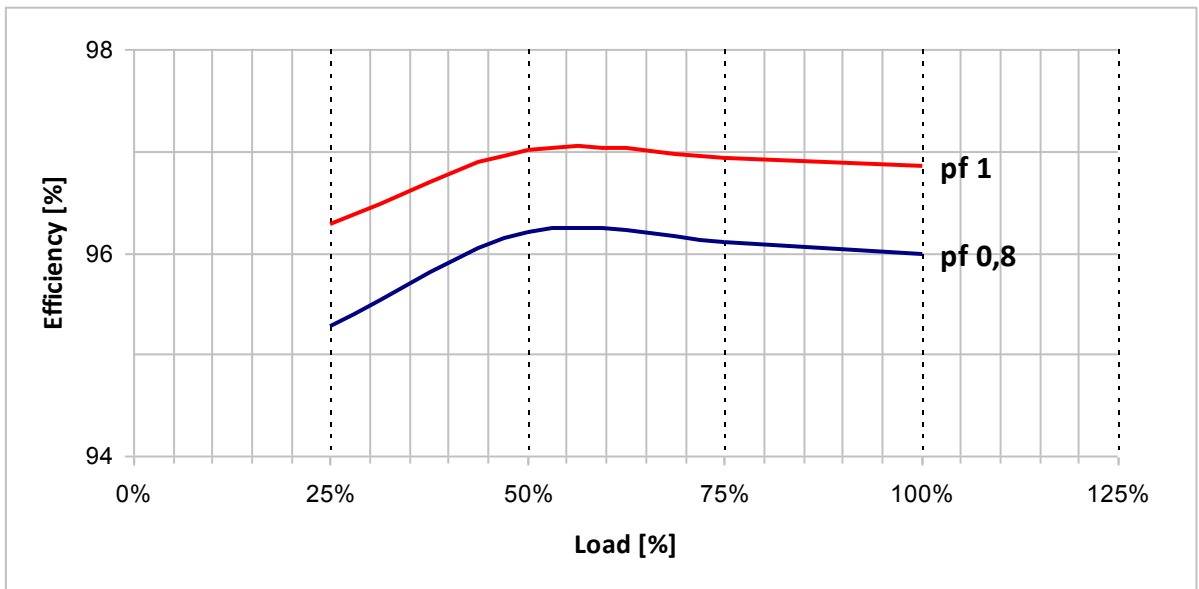


**415 V**

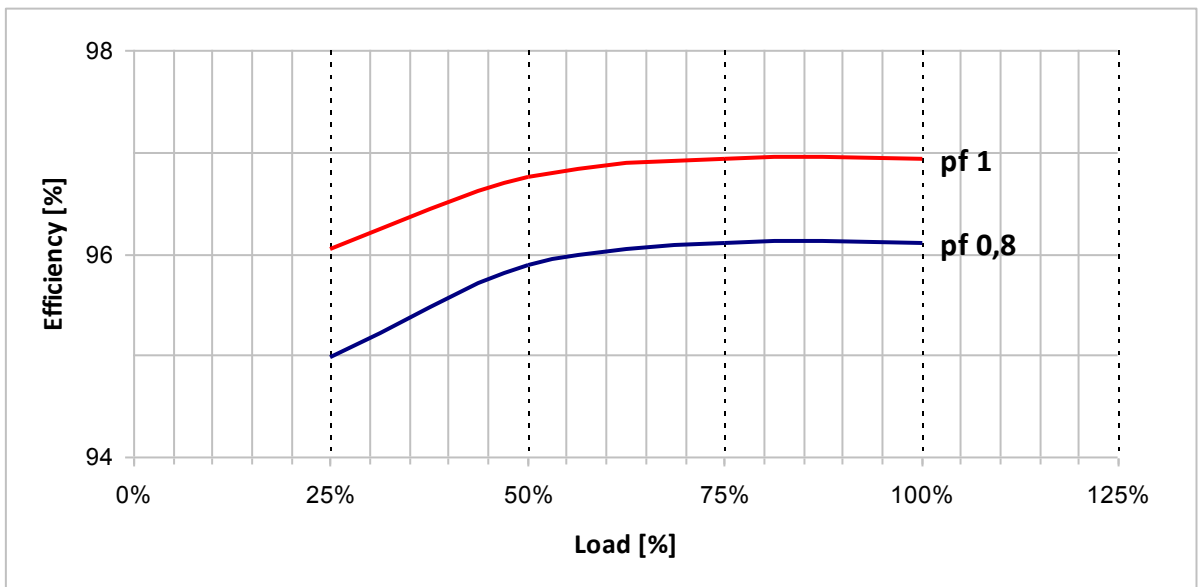

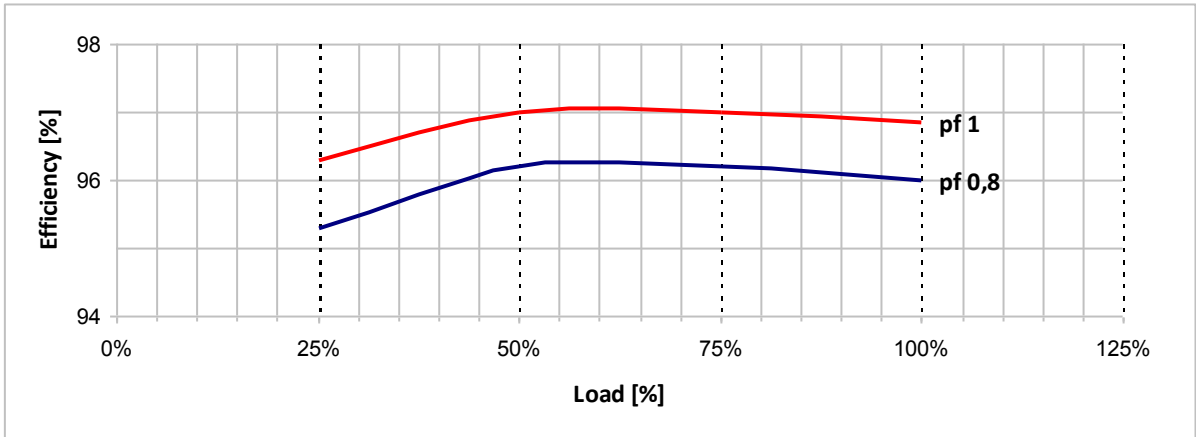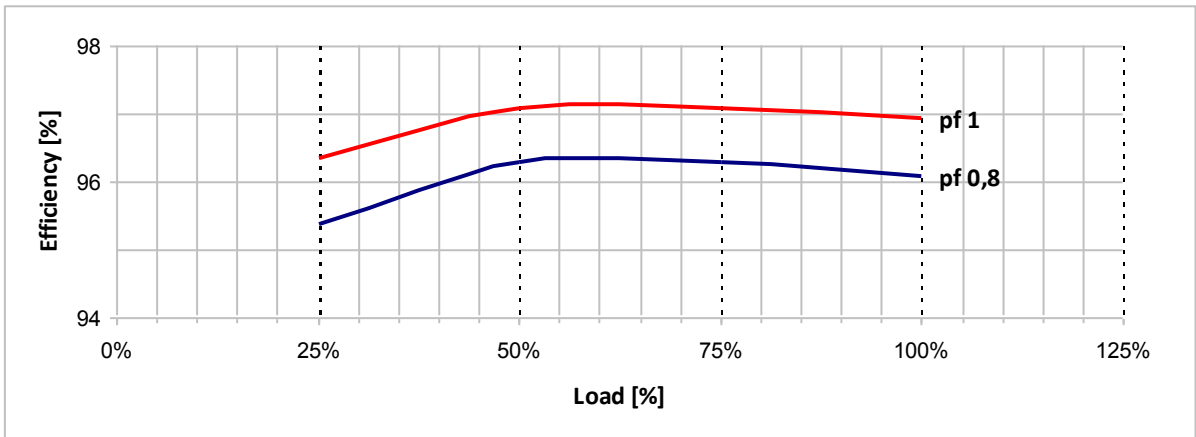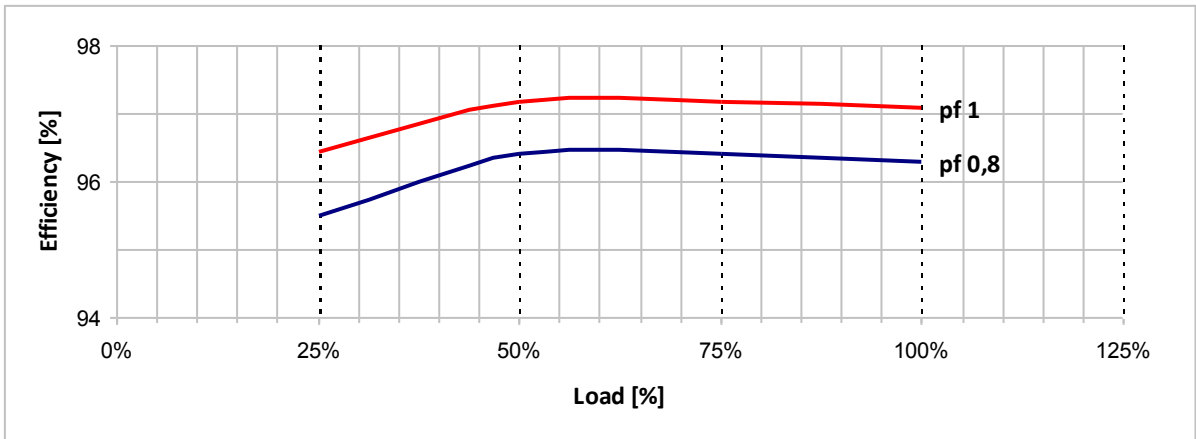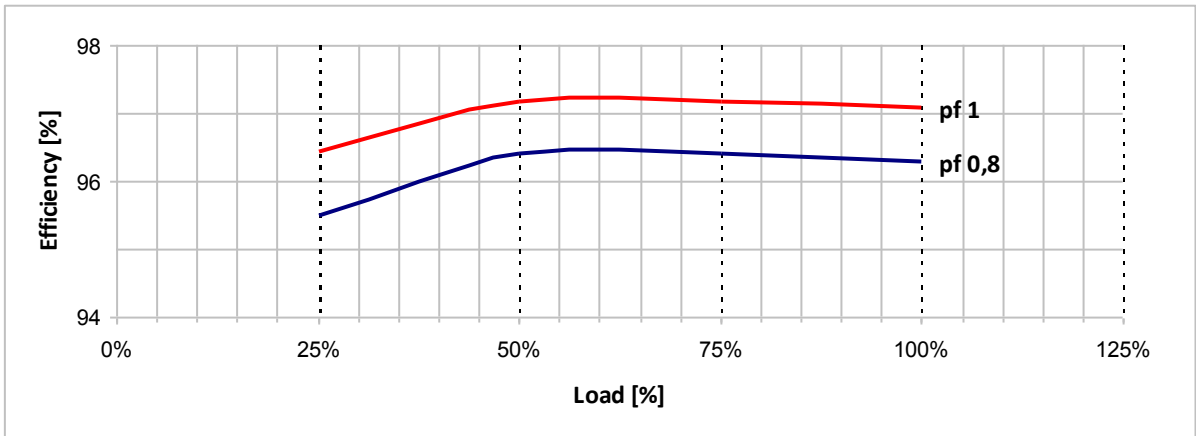**Typical efficiency curves**
**60 Hz - 1800 rpm**
**416 V**

**440 V**

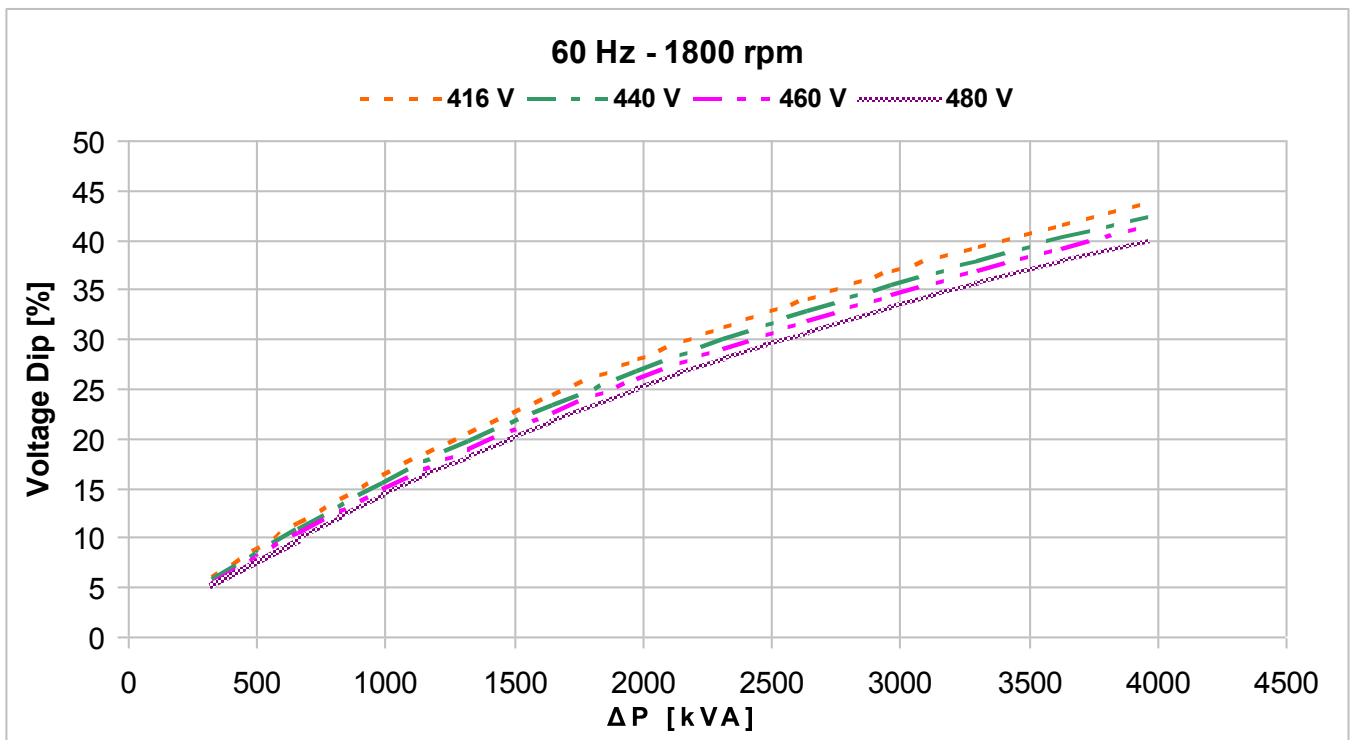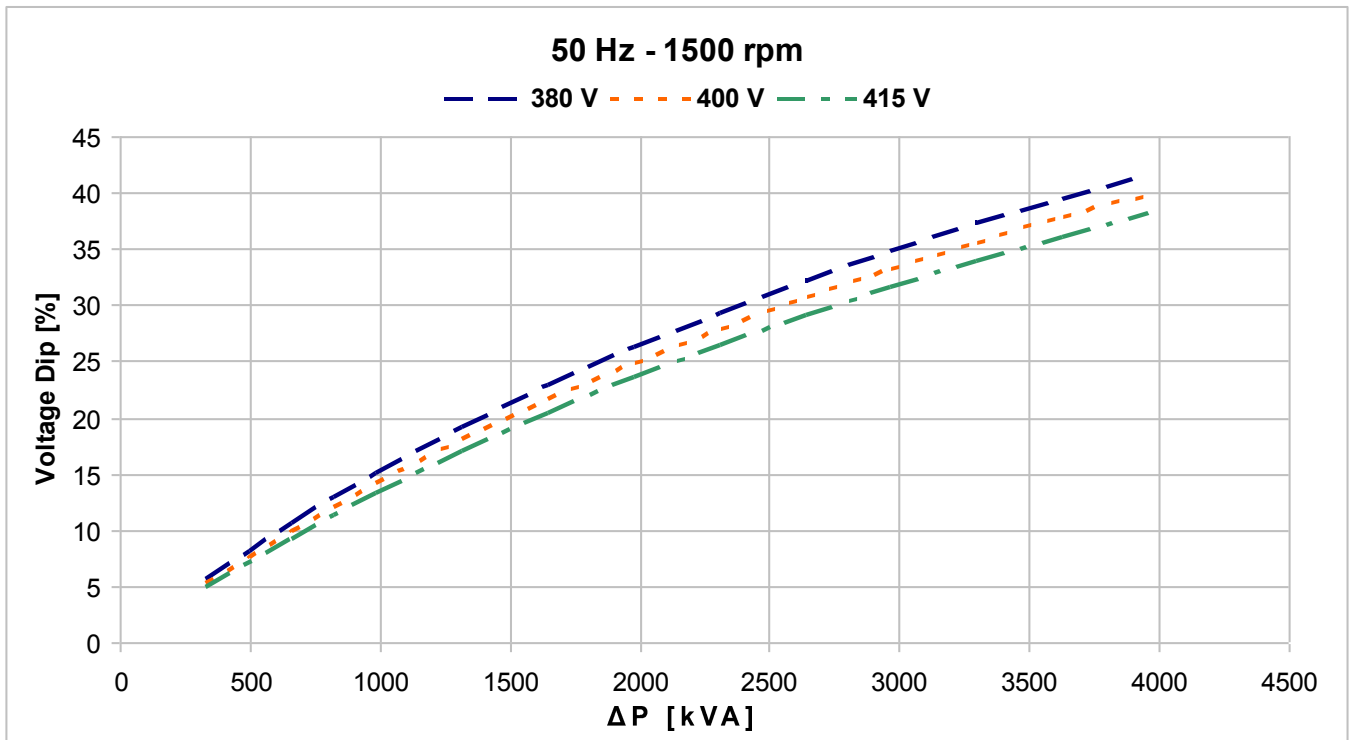**460 V**

**480 V**


### Locked rotor motor starting curves (\*)



$$\Delta P = P_n \times \frac{I_s / I_n}{\cos \varphi_n \times \eta_n}$$

(\*): A coefficient of 0,85 must be applied to the voltage dip if the load has a power factor equal or greater than 0,8.