

CONTINUOUS DUTY
**4 poles
50 Hz - 1500 rpm / 60 Hz - 1800 rpm**

AMBIENT TEMPERATURE	40°C	WINDING DATA		Winding code	80			
TEMPERATURE RISE	H			Number of leads	6			
INSULATION CLASS	H			Winding pitch	2/3			
POWER FACTOR	0,8							
FREQUENCY	Hz	50 Hz			60 Hz			
VOLTAGE	Star V	380	400	415	416	440	460	480
RATING	kVA kW	1150 920	1150 920	1150 920	1320 1056	1370 1096	1400 1120	1420 1136
EFFICIENCY [%] @ 0,8 p.f.	4/4 3/4 2/4	95,5 95,8 95,9	95,6 95,8 95,8	95,7 95,8 95,8	95,6 95,9 96,0	95,8 96,0 96,1	95,9 96,2 96,2	96,0 96,2 96,2
EFFICIENCY [%] @ 1 p.f.	4/4 3/4 2/4	96,4 96,7 96,8	96,5 96,7 96,7	96,6 96,7 96,7	96,5 96,7 96,8	96,7 96,8 96,9	96,7 97,0 97,0	96,8 97,0 97,0
SHORT CIRCUIT RATIO	SCR	0,41	0,45	0,48	0,35	0,38	0,41	0,44
REACTANCES [%]								
Direct axis synchronous	X _d	283	255	237	325	301	282	262
Quadrature axis synchronous	X _q	158	143	133	182	169	158	147
Direct axis transient	X' _d	27,1	24,5	22,8	31,2	28,9	27,1	25,2
Direct axis subtransient	X'' _d	12,4	11,2	10,4	14,3	13,2	12,4	11,5
Quadrature axis subtransient	X'' _q	12,9	11,6	10,8	14,8	13,7	12,8	11,9
Negative sequence	X ₂	12,6	11,4	10,6	14,5	13,5	12,6	11,7
Zero sequence	X ₀	3,2	2,9	2,7	3,7	3,4	3,2	3,0
TIME CONSTANTS [s]								
Open circuit	T' _{do}				2,41			
Transient	T' _d				0,23			
Subtransient	T'' _d				0,017			
Armature	T _a				0,026			

MECHANICAL CHARACTERISTICS

D-end bearing/Lubrication	6324 C3 / With grease nipple
N-end bearing/Lubrication	6318 Z C3 / Prelubricated
Overspeed [r.p.m.]	2250
Inertia (J) [kgm ²]	Refer to B34 construction 19,3
Weight [kg]	Refer to B34 construction 2550
Method of cooling	IC01
Cooling air required [m ³ /s] @ 50/60 Hz	1,30 / 1,55
Degree of protection	IP23
Types of construction available	B2 (SAE) - IM B34 - IM B20
Direction of rotation (Standard)	CW

OTHER DATA

Phase resistance [Ω] @ 20 °C - Star series	1,8
Overloads	10% for 1 hour every 12 hours
3-phase short circuit sustained current	≥ 300 % (3 I _n) with auxiliary winding
Voltage regulation accuracy	± 0,5 % I _n steady state condition
Radio interference	EN 55011 - Class B Group 1
Wave form THF	< 2%
Total harmonic content	< 2% - At no load


STANDARDS

IEC 60034-1; CEI 2-3; BS 4999-5000; VDE 0530; NF 51-100,111; OVE M-10, NEMA MG 1.22.


Typical efficiency curves

50 Hz - 1500 rpm

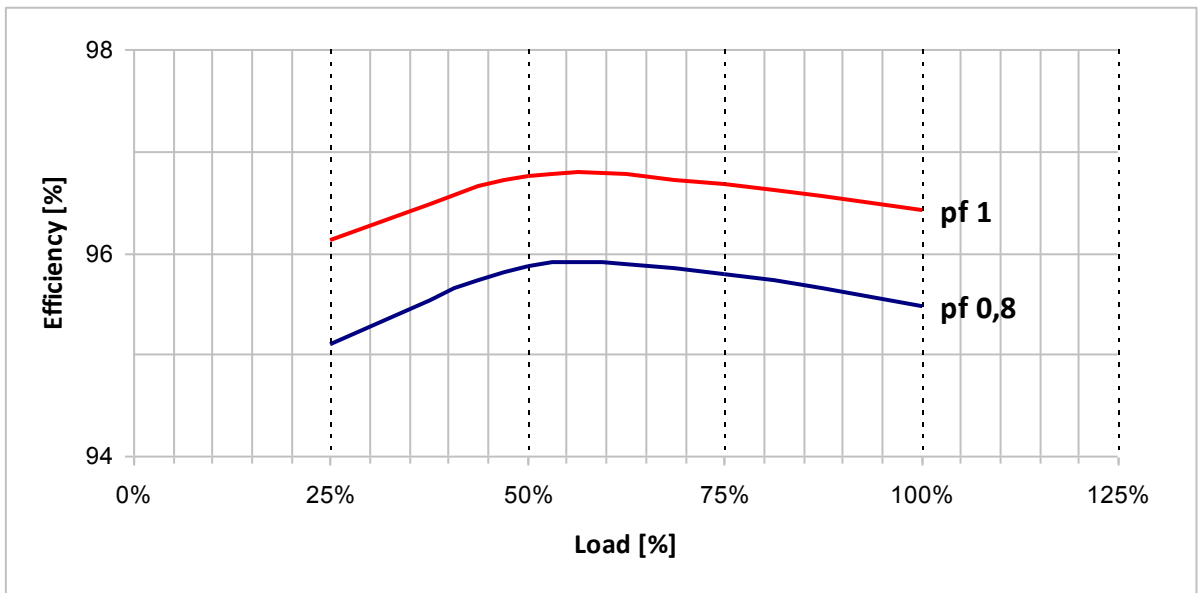
380 V







400 V


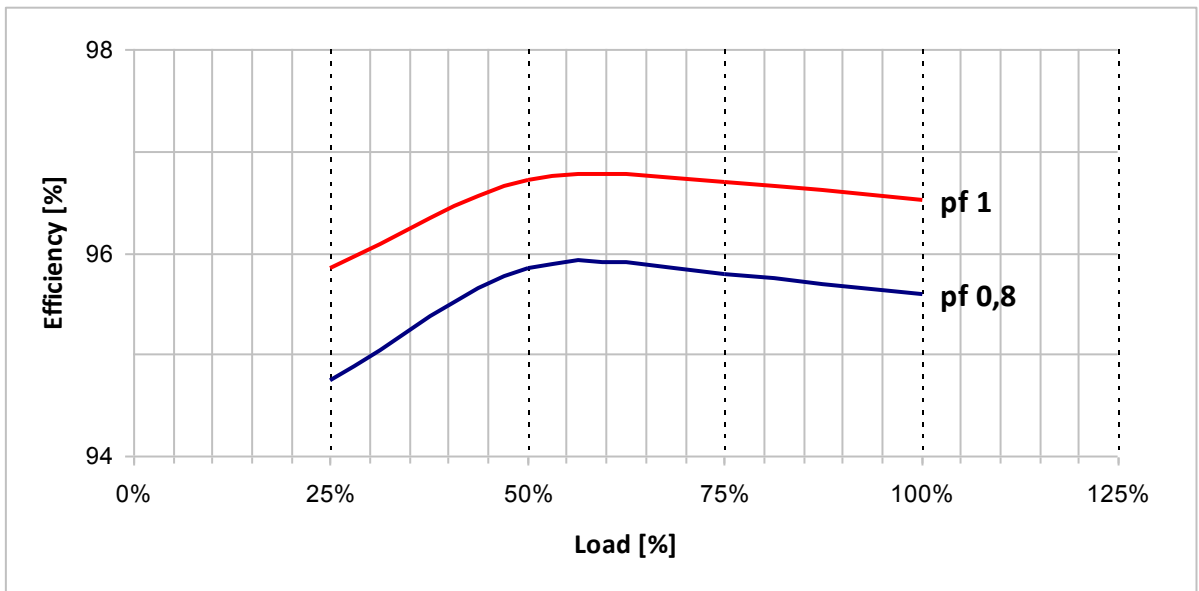


415 V

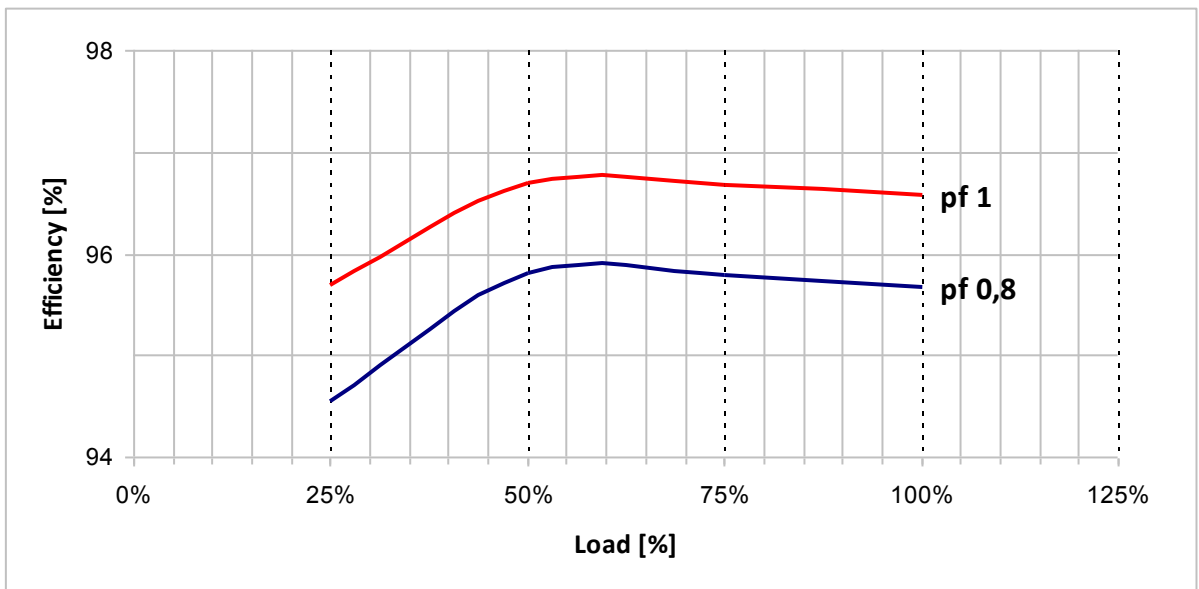

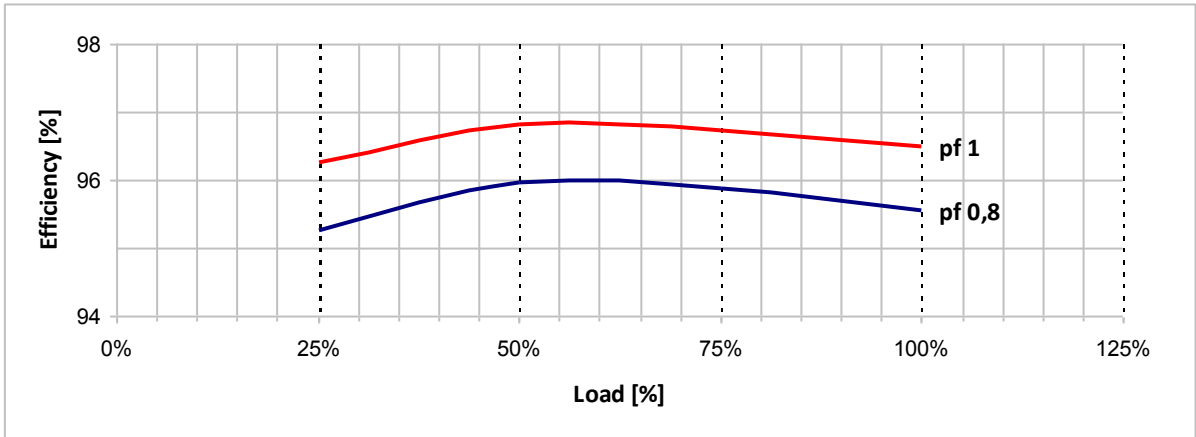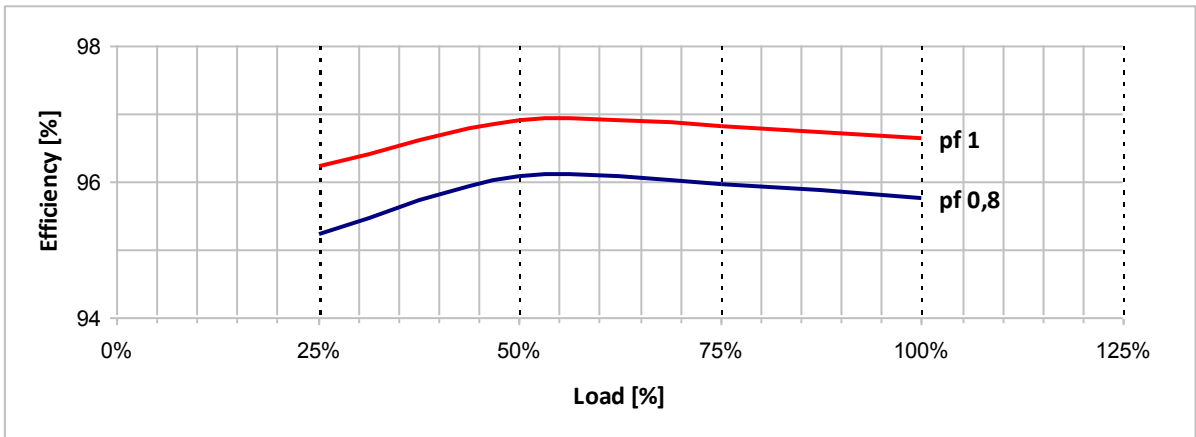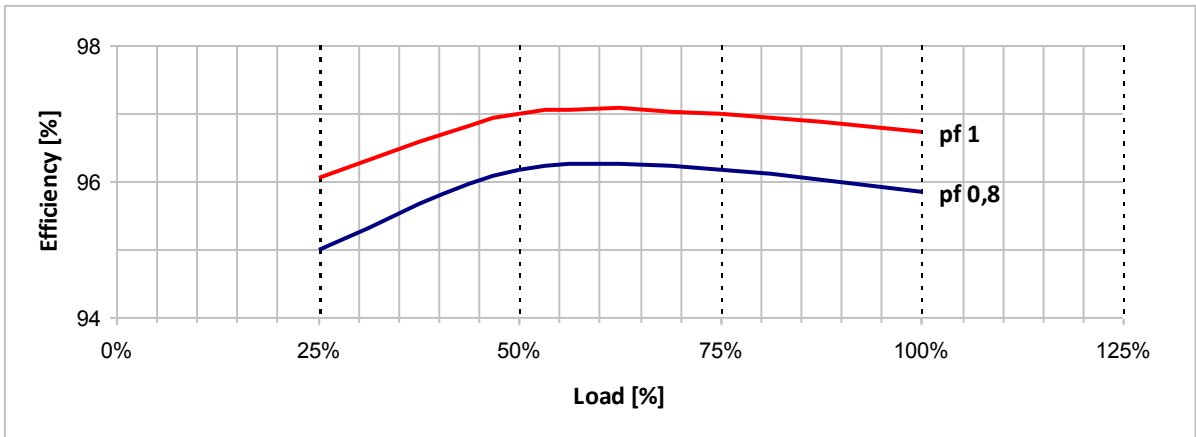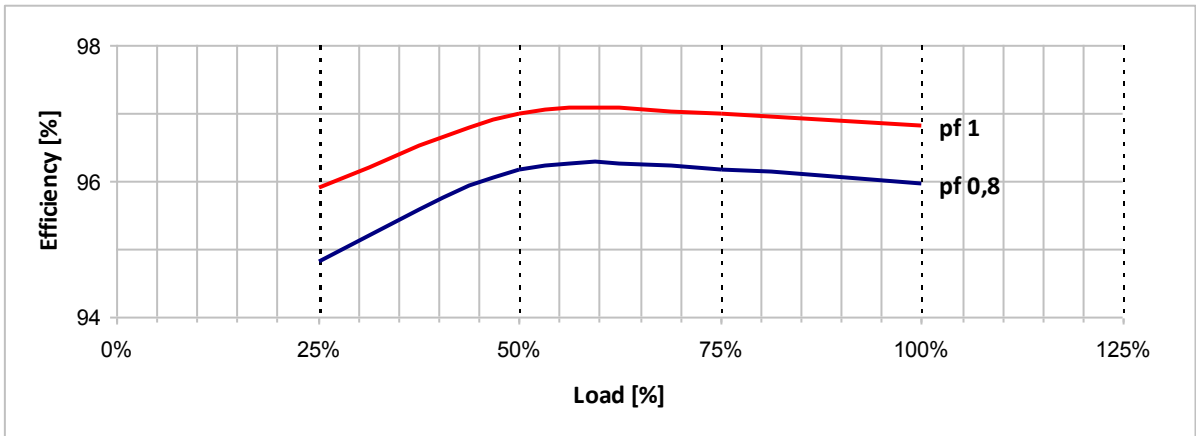Typical efficiency curves
60 Hz - 1800 rpm
416 V

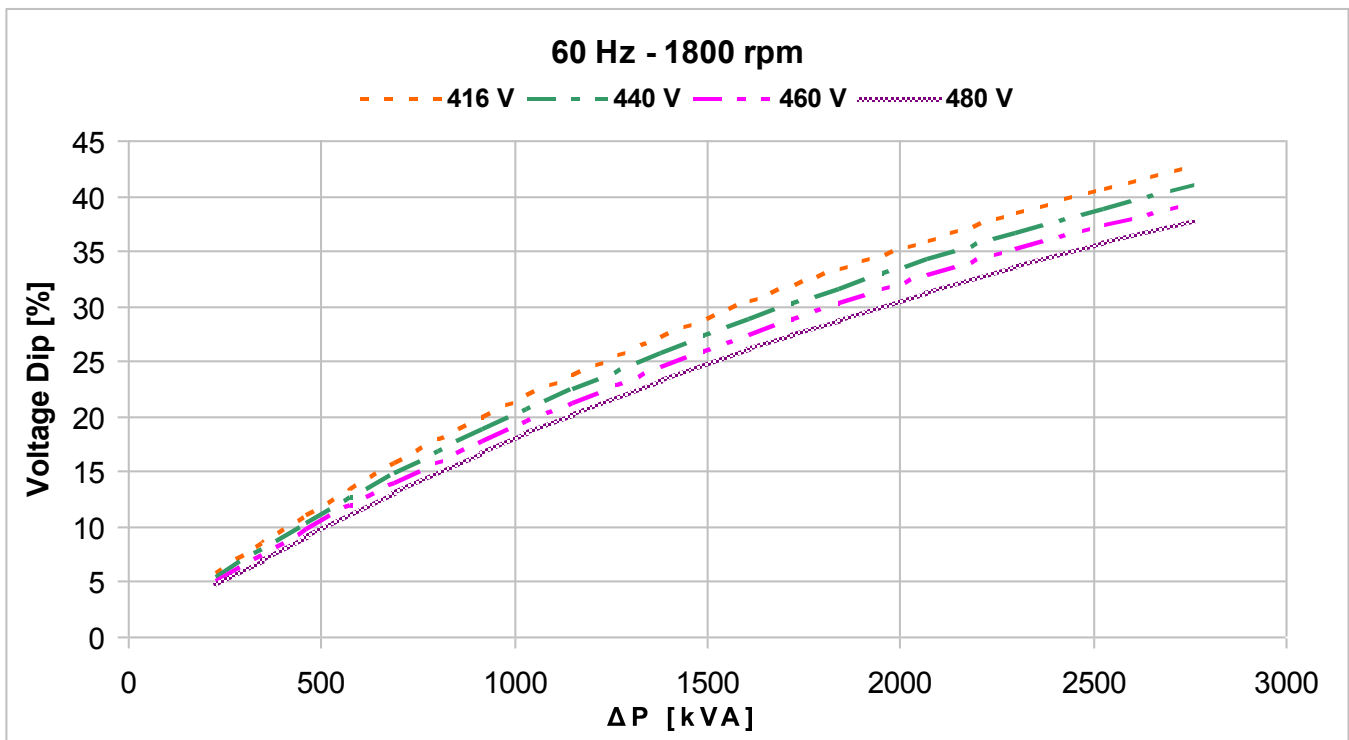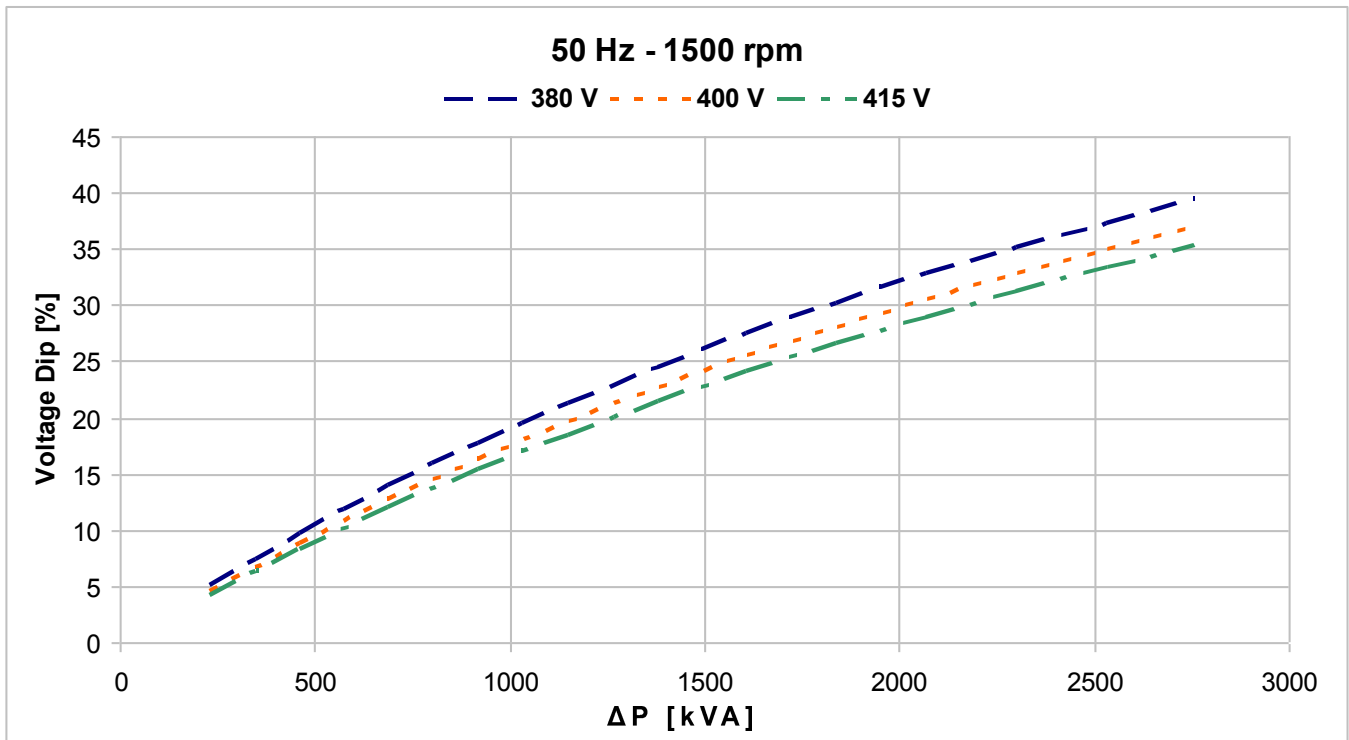440 V

460 V

480 V


Locked rotor motor starting curves (*)



$$\Delta P = P_n \times \frac{I_s/I_n}{\cos \varphi_n \times \eta_n}$$

(*): A coefficient of 0,85 must be applied to the voltage dip if the load has a power factor equal or greater than 0,8.